

Elvacite[®] 2045

Acrylic Resin

Elvacite[®] 2045 is a high molecular weight iso-butyl methacrylate resin for use in a variety of coatings, inks and adhesives applications. Elvacite[®] 2045 is useful in topcoats for vacuum metallized plastics and in lacquers for other solvent – sensitive substrates. Elvacite[®] 2045 can also be used as a binder for ceramic applications to provide excellent burnout characteristics. Elvacite[®] 2045 is softer than Elvacite[®] 2042 and 2043. Due to its high molecular weight and re-solubility, it finds use as a binder in many silkscreen ink applications.

Performance Features and Key Benefits

- Topcoats for vacuum metallized plastics for excellent abrasion resistance and flexibility.
- Lacquers for solvent – sensitive substrates for solubility in alcohols and improved abrasion resistance.
- Silkscreen inks for excellent re-solubility.
- Temporary binders for ceramics and electronics applications due to its clean burnout characteristics.

Typical Properties^a

Appearance	Solid bead
Specific Gravity, 25° C	1.09
Glass Transition Temp, onset (calculated)	48°C
Molecular Weight (Mw)	260,000
Acid Number (mg KOH/g Resin)	0
Tensile Strength, psi	3,600
Elongation at break (23° C, 50% RH)	1%

a) Typical physical properties listed are approximate values and should not be considered manufacturer's release specifications. Manufacturer's release specifications are subject to change without notice, please contact your Elvacite[®] representative for the latest product specification details.

Storage & Handling

Elvacite[®] 2045 should be stored in a cool, dry place away from heat sources. Do not store at or above the Tg as resin blocking can occur. Please consult the Safety Data Sheet for additional safety information.

Preparing Solutions

Elvacite® resins dissolve at room temperature but require constant agitation to prevent solvent-swollen granules of polymer from forming agglomerates and sticking to the walls of the vessel. Important: The polymer beads should be sifted directly into the vortex of the stirred solvent to speed wetting-out and dispersion. Continuous low-shear agitation for periods of 1-12 hours, depending on the grade and concentration of resin, is recommended.

After the solution appears clear in the tank, a sample should be spread out on a Leneta card or glass. After the solvent evaporates and a film forms on the card or glass, there should not be any resin seeds. If there are any seeds, the tank should be agitated further to fully dissolve the resin. Tank agitation should not be stopped (except for sampling) until the film test indicates there are no resin seeds. Any cloudiness or residue may indicate that some polymer remains undissolved. The presence of water in the system can also cause cloudiness.

Solution time can be reduced by heating; most common solvents can be heated to approximately 49°C (120°F) without the need for reflux equipment. High-shear agitation also cuts dissolving time, but requires care to avoid overheating and excessive solvent loss.

Viscosity

Table II illustrates typical viscosities of Elvacite® 2045 by varying both solvent and resin concentration.

Solvent	Concentration (% Solids)		
	20%	30%	40%
Toluene	70	200	1300
Methyl Ethyl Ketone	20	90	800
Isopropyl Acetate	25	250	1300
Cellosolve Solvent	1000	6000	>25000
Isopropyl Alcohol	1000	8000	>25000
Mineral Spirits (10% aromatic)	275	900	7000

Solvent Solubility at 20% solids


Alcohols		Ethyl acetate	C	Ketones	
Methyl Alcohol	I	Isopropyl acetate	C	Acetone	C
Ethyl Alcohol	H	n-butyl acetate	C	Methyl Ethyl Ketone	C
n-propyl Alcohol	C	n-amyl acetate	C	Methyl Isobutyl Ketone	C
Isopropyl Alcohol	C	Butyl lactate	C	Diisobutyl Ketone	C
Isoamyl Alcohol	C	Propylene glycol monoethyl ether acetate	C	Cyclohexanone	C
Cyclohexanol	C	Methyl amyl acetate	C	Isophorone	C
Ethylene glycol	I			Diacetone Alcohol	C
Glycerol	I	Ethers		Methyl amyl ketone	C
		Diethyl Ether	C		
Amides		Diisopropyl ether	I	Nitrile	
Formamide	I	Tetrahydrofuran (THF)	C	Acetonitrile	I
Dimethyl formamide (DMF)	C	"Cellosolve" Solvent	C		
				Nitroparaffins	
Chlorohydrocarbons		Hydrocarbons		Nitromethane	I
Methylene Chloride	C	Toluene	C	Nitroethane	C
Ethylene dichloride	C	Xylene	C		
Perchloroethylene	C	n-Hexane	H		
1, 1, 1- Trichloroethane	C	Cyclohexane	C		
		VM & P Naphtha	C		
Esters		Turpentine	C		
Methyl formate	C	Mineral Spirits (10% aromatic)	C		
(C = Clear Solution, H = Hazy Solution, I = Insoluble)					

Thermal Gravimetric Analysis

Sample Mass = 10-20 mg

Heating Rate = 2°C/minute

Purge Rate = 5.4 Liters/Hour

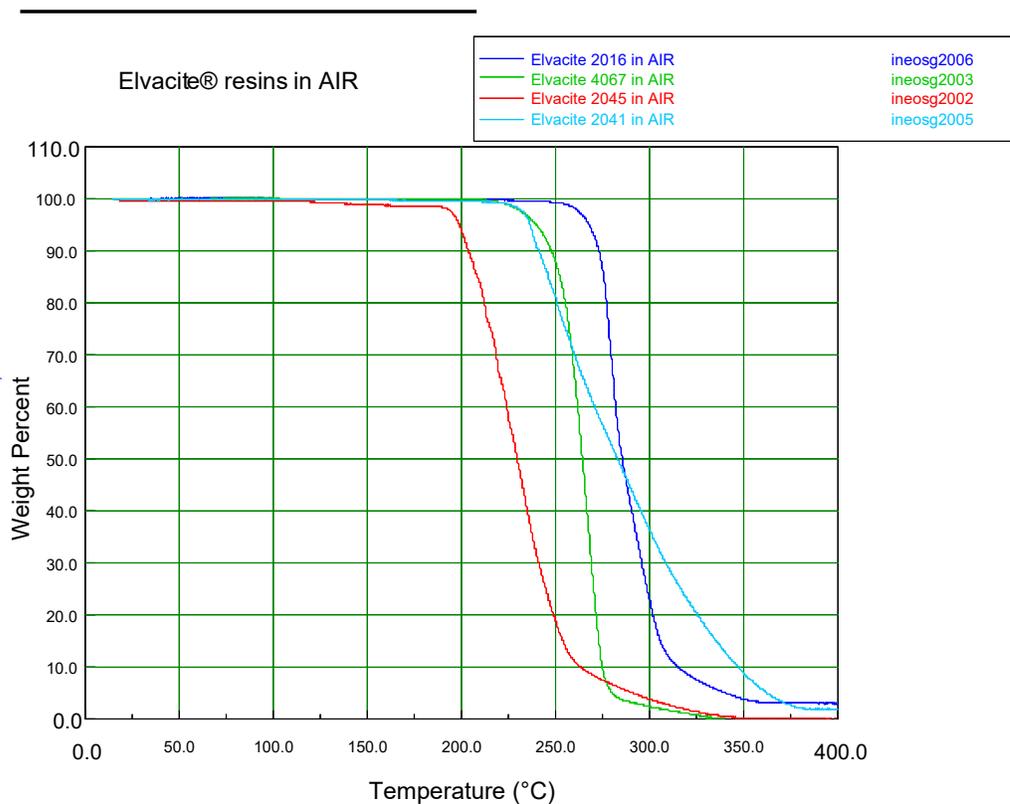

Resin Compatibility

Elvacite® 2045 is compatible with the following Elvacite® Resin Grades: 2028, 2044, and 2046. It is also compatible with the other types of resins, as illustrated in the following table (C=Clear solution, H=Hazy solution, I=Insoluble):

Blending Resin	Description	Form of Blended Resin Tested	Supplier	Elvacite / Blending Resin* (by solids weight)		
				75/25	50/50	25/75
Alkyd						
Aroplaz 1271	Long linseed drying oil	30% in MEK	Reichold	X	X	I
Aroplaz 1351	Long castor nondrying oil	30% in MEK	Reichold	C	C	C
Chempol 13-1410	Safflower drying oil, acrylate modified	50% in Xylene	Cook Comp & Poly.	--	I	I
Paraplex RGA-2/80	Nondrying oil, sebacic	80% in n-butyl acetate	C P Hall Co	I	I	I
Blagden 3105	Short coconut nondrying oil	60% in Xylene	Blagden Chemicals	--	I	I
Cellulosic						
Cellulose acetate 39-5-5B		30% in Acetone or MEK	Hoechst-Celanese	I	I	I
Cellulose Acetate Butyrate, ½ - sec.		30% in MEK	Eastman Chemical	I	I	C
Ethyl Cellulose N-7		30% in MEK	Hercules Inc.	I	I	I
Nitrocellulose "RS", ½-sec Isopropyl		MEK/alcohol soln.	Hercules Inc.	C	C	C
Epoxy						
Epon 828		100% Resin	Resolution	--	H	H
Epon 1001		30% in MEK	Resolution	I	I	I
Elastomers						
EMD-504	Polyisobutylene	30% in Toluene	Exxon Chemical	I	I	I
Hypalon 30	Clorosulfonated polyethylene	15% in Toluene	Dupont Polymers	I	I	---
Neoprene AC-Soft	Polychloroprene	15% in Toluene	Dupont Polymers	I	I	---
Rosin Derivatives						
Ester Gum 8L		30% in MEK	Hercules Inc.	C	C	C
Pentalyn 255	Pentaerythritol ester	30% in MEK	Hercules Inc.	H	H	H
Pentalyn 830	Pentaerythritol ester	30% in MEK	Hercules Inc.	H	H	H
Vinyl Chloride Resins						
UCAR®Solution Vinyl VAGH	Copolymer	30% in MEK	Union Carbide	C	C	C
UCAR®Solution Vinyl VMCH	Copolymer	30% in MEK	Union Carbide	C	C	C

UCAR®Solution Vinyl VYHH	Copolymer	30% in MEK	Union Carbide	C	C	C
UCAR®Solution Vinyl VYNS	Copolymer	15% in MEK	Union Carbide	C	C	C
Exon 450	Copolymer	15% in MEK	Freestone Plastics	C	C	--
Other Types						
Arochem 650	Maleic-modified hard resin	30% in MEK	Reichold	C	C	C
Aroset 4110	Acrylic resin	30% in MEK	Reichold	H	H	H
Dammar		30% in Toluene		I	I	H
DC-840	Silicone resin	60% in Toluene	Dow Corning Corp.	C	C	C
Parlon S 10	Chlorinated rubber	30% in MEK	Hercules Inc.	I	I	I
Piccoumaron	Coumarone-indene resin	30% in MEK	Hercules Inc.	C	C	C
Santolite MHP	Sulfonamide-formaldehyde	30% in MEK	Monsanto Co.	I	I	I
Shellac		30% in Methanol		H	I	I
Super-Bechacite 2000	Permanently fusible phenolic	30% in MEK	Reichold Chemicals	C	C	C
Uformite MX-61	Triazine-formaldehyde resin	30% in MEK	Rohm & Haas Co.	C	C	C

Plasticizer Compatibility

Softening of Elvacite® 2045 is preferably accomplished by blending with Elvacite® 2044.

Silly String and Artificial Snow Sprays (Aerosols)

In this kind of application, the texture of the product changes as the ratio of resin to stearic acid changes. With higher resin content a “string” will be the result, whilst with higher stearic acid a more “snowy” and friable texture will be the result.

Typical Formulations

The following formulations are given as a starting point only. The final formulation will be determined by the properties desired.

Artificial Snow Spray

Ingredients	% by Wt.
Elvacite® 2045	4.0
Stearic acid	8.0
Acetone	21.0
Propellant*	67.0

Silly String Spray

Ingredients	% by Wt.
Elvacite® 2045	5.5
Stearic acid	6.5
Acetone	21.0
Propellant*	67.0

*Propellants for both formulations may be butane, dimethyl ether, or HFC-134a.

COMPLIANCE WITH FDA REGULATIONS revised April 1, 2019

Pasadena, Texas, USA Grade: ELVACITE® 2045

Issue date: December 2019

We, MITSUBISHI CHEMICAL AMERICA, INC., Specialty Resins Division, confirm that Elvacite® 2045 complies with the compositional requirements of the following United States of America's Food and Drug Administration (FDA) regulations.

Elvacite® 2045 is cleared for use under the FDA 21 CFR 175.105 for adhesives used as components of articles intended for use in the packaging, transporting, or holding food.

Elvacite® 2045 is cleared for use under FDA 21 CFR 175.300 in resinous and polymeric coatings used as the food contact surface of articles intended for use in producing, packing, processing, preparing, treating, packaging, transporting, or holding food. The coating in its finished form in which it is to contact food is subject to a restriction on its chloroform soluble extractives.

Compliance with the limitation on extractives can only be demonstrated by tests carried out in the final article.

Elvacite® 2045 is cleared for use under FDA 21 CFR 175.320 in resinous and polymeric coatings for polyolefin films, provided it is intended for repeated food contact use as specified in FDA 21 CFR 175.300(a).

The coating in its finished form in which it is to contact food is subject to a restriction on its chloroform soluble extractives.

Compliance with the limitation on extractives can only be demonstrated by tests carried out in the final article.

Elvacite® 2045 is not cleared for use under FDA CFR 176.170 as a component of the uncoated or coated food contact surface of paper and paperboard intended for use in producing, manufacturing, packing, processing, preparing, treating, packaging, transporting or holding aqueous and fatty foods.

Compliance with the limitation on extractives can only be demonstrated by tests carried out in the final article.

Elvacite® 2045 is cleared for use under FDA 21 CFR 176.180 as a component of the uncoated or coated food contact surface of paper and paperboard intended for use in producing, manufacturing, packing, processing, preparing, treating, packaging, transporting, or holding dry food.

Elvacite® 2045 is not cleared under FDA 21 CFR 177.1010 as semirigid and rigid acrylic plastics articles intended for use in contact with food. The semirigid and rigid acrylic plastics in the finished form in which they are to contact food are subject to limitation on extractives

Compliance with the limitation on extractives can only be demonstrated by tests carried out on the final article.

This statement of compliance is correct at the date of issue.

As food contact regulations and product formulations are subject to change, it is the user's responsibility to ensure that they are in possession of a current statement of compliance.

Pasadena, Texas, USA

Issue date: January 2022

Mitsubishi Chemical America, Inc., Specialty Resins Division hereby certifies that the country chemical inventory status of Elvacite® 2045 is as follows.

US	CA	AU	CN	KR	NZ	PH	TW	JP	Russian Federation	TH	Vietnam
TSCA	DSL	AIIC	IECSC	KECI	NZIoC	PICCS	TCSI	ENCS	Unified list of chemicals	DIW	NCI
Listed as Active	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y

Y: Listed

N: Not Listed

For further information or samples, please contact your local distributor, or:

Mitsubishi Chemical America, Inc.

Specialty Resins Division
9675 Bayport Blvd.
Pasadena, Texas 77507
Phone (713)758-8190
www.m-chem.com/specialtyresins
MCA-SPR.sales@m-chem.com

The recommendations, suggestions and data contained herein are believed to be true and accurate as of the time of printing. Mitsubishi Chemical America, Inc. does not represent, warrant or guarantee the completeness or reliability of the same, since the conditions of use, including in combination with other products, are beyond our control and can affect the performance and properties of our products. The user is solely responsible for confirming that our product is suitable for the intended end use, and for compliance with all legal regulations and patents. Other than compliance with published Mitsubishi Chemical America, Inc. specifications for the warranty period if properly handled, and except as required by law, MITSUBISHI CHEMICAL AMERICA, INC. MAKES NO WARRANTIES, EXPRESS OR IMPLIED, ORAL OR WRITTEN, ARISING BY LAW, CONTRACT, STATUTE OR OTHER LEGAL THEORY OR OTHERWISE, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ANY WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If a product is found to be defective during the warranty period, user's sole remedy and our sole obligation is, at our option, replacement of the affected product or refund of the purchase price. Except as required by law, we are not liable for any damage, harm or loss resulting from our product, whether direct, indirect, consequential, incidental or special, and irrespective of legal theory asserted, including strict liability, contract, warranty, or negligence.